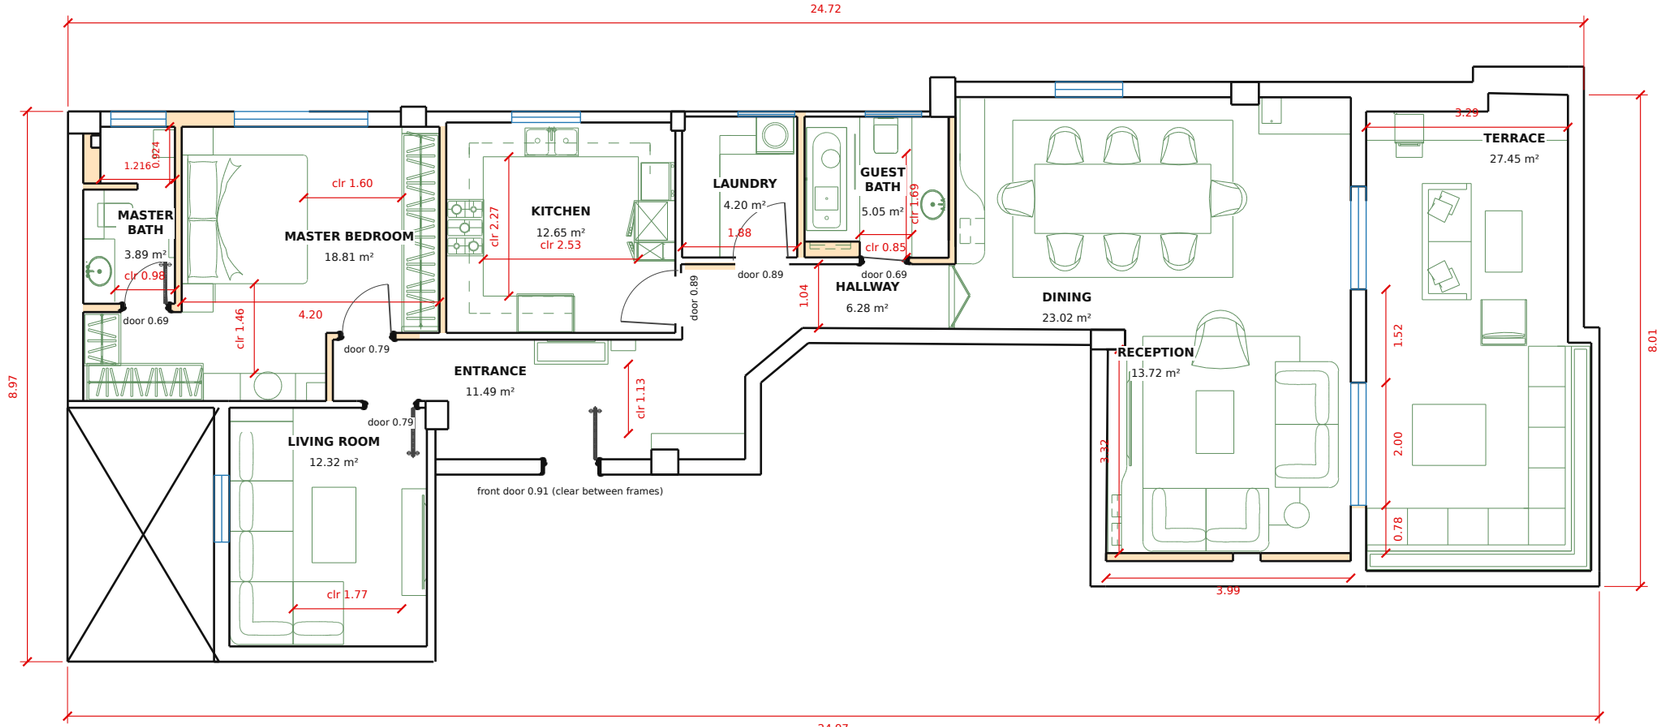



## 4 NEW DESIGN PLAN (SHIFTED BEDROOM)

K04

SCALE 1:100

SCALE BAR 1:100 (A3)

0 1 2 3 4 5 m

N

**PLAN NORTH**
(+Y, project convention)
**TRUE NORTH TO BE CONFIRMED**

### Key clearances (from dwg/shifted-bedroom.dxf):

- Master shower 1.216 × 0.924 m (28 cm back-wall build-out with niche stack N1, 10 cm partition N2).
- Master bath: 0.98 clear in front of the vanity, 0.69 in front of the WC; door leaf 0.69 (0.76 between frames).
- Bedroom: bed 1.99 × 2.10; 1.60 clear bed foot to the kitchen-wall wardrobe, 1.46 bed to desk.
- Kitchen: aisles 2.53 (E–W) and 2.27 (N–S) between counter fronts; door now in the east wall.
- Guest bathroom: 0.85 between bath and vanity; 1.69 from WC front to the door wall.
- Entrance: 1.13 passage between the bench front and the console front (≥ 0.90 rule, < 1.20 ideal).
- Living: 1.77 between sofa and TV unit. Reception depth 3.32 after the 13 cm build-out (N12/N13).
- Reception east wall: sofa window 2.00 m (was 1.40), centred on the 3D sofa; wall 0.78 S, 1.52 N (K02 DW4, K03 NW3).
- Door labels are leaf widths from the model (door blocks); clear openings are a few cm less.
- Areas are the design's; compare K01 for today. Ceiling 2.60 assumed (not surveyed).

### ROOM AREAS (net, from geometry)

| ROOM (design) | NET AREA m² |
|---|---|
| Master Bedroom | 18.81 |
| Master Bathroom | 3.89 |
| Kitchen | 12.65 |
| Laundry | 4.20 |
| Guest Bathroom | 5.05 |
| Living Room | 12.32 |
| Entrance | 11.49 |
| Hallway | 6.28 |
| Dining | 23.02 |
| Reception | 13.72 |
| **Total indoor (net)** | **111.44** |
| Terrace | 27.45 |

### GENERAL NOTES:

1. All dimensions in metres (m), areas in m², unless noted. Do not scale from this drawing.
2. Contractor to verify all dimensions and levels on site before starting and report any discrepancy before work.
3. Base: surveyor's AS BUILT PLAN (Sep 2026, dwg/as-built.dxf) and the project model (dwg/shifted-bedroom.dxf), same coordinate frame.
4. Wall height taken as 2.60 m (project model ceiling height; not surveyed) for areas.
5. Structural engineer to confirm any removal, opening or new wall at or near columns or possibly load-bearing walls before work. No structural element may be cut without written approval.
6. Any façade / window change needs Al Lotus approval and a structural check.
7. Room areas: net floor area inside wall faces, from the model geometry; open-plan zones are split at notional lines.
8. North: plan north (+Y) is the project convention; true north to be confirmed.

### LEGEND:

- Wall (design drawing)
- Tint: new wall / infill (see K03)
- Window / terrace slider
- Door leaf + swing; label = leaf width
- Furniture, joinery, fittings (DXF furniture layers + blocks)
- 1.23 — Dimension / clearance (m); 'clr' = clear between faces
- **ROOM** — Room name (design) and net floor area (m²)

### REVISIONS:

| REV | DATE | DESCRIPTION |
|---|---|---|
| **A** | OCT 2026 | First issue (K01–K04 set) |

CLIENT / BUILDING APPROVAL STAMP:

DESIGNED BY:
**Karim Tamer — design**
(drawn from the project model)

location :
AL LOTUS
NEW CAIRO

PROJECT :
PRIVATE APARTMENT

DRAWING TITLE :
**NEW DESIGN PLAN**
Shifted Bedroom design — furnished, key clearances

ARCHITECTURE

| AREA: | DATE: |
|---|---|
| NEW CAIRO | OCT 2026 |

SCALE:
**1:100 @ A3 (420 x 297)**

| DRAWN BY: | CHECKED BY: |
|---|---|
| K. TAMER | — |

| STATUS: | REV.: | SHEET NO.: |
|---|---|---|
| FOR REVIEW | **A** | **K04** |